

Instructions

# T-block electrical connector for MTZ/MT/NTZ/VTZ

## Mounting guideline

### 1. Introduction

The T-block electrical connector is delivered in the mounting kit for self-installation (see fig.1). We would like to guide you through the assembly process.

### 2. T-block assembling

Remove the T-block from the plastic bag.

Gently place it on the terminal pin and press it firmly (as shown in fig. 2 to 3). Then, bend the lugs so that they rest on the terminal screws (fig. 4).

*Note: Manipulating the lugs on the T-block should be done a maximum of 1 or 2 times, as they are very fragile.*

Now the compressor electrical terminal is ready for connecting the power cables (fig. 5).

### 3. Cabel mounting torque

Use mounting torque of 3Nm for Electrical T-block screws.



fig. 1



fig. 2



fig. 3



fig. 4

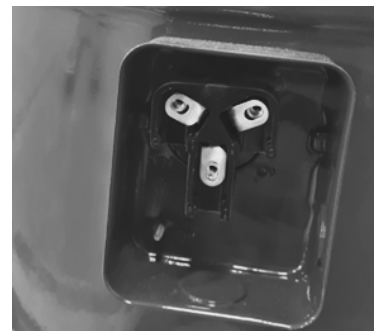


fig. 5



**Danfoss A/S**

Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.